

Wide FOV Electronic Autocollimator

Extreme Resolution with Wide Field of View



- Precise USB3.0 device combining the functionality of autocollimator and alignment telescope.
- High resolution of down to 0.01 arc sec or 0.05 μ rad, with clear aperture exceeding 45 mm.
- Built-in computer controlled laser pointer for easy alignment.
- Built-in Pan & Tilt adjusting mechanics.


Specifications

FoV Autocollimator	$\pm 45'$ (V) x $\pm 1^{\circ}10'$ (H)
FoV Telescope & Beam Profiler	$\pm 1^{\circ}30'$ (V) x $\pm 2^{\circ}20'$ (H)
Clear Aperture	45 mm
Autocollimator's Resolution	0.01 sec
Autocollimator's Accuracy	1.0 sec
Light Source	LED- 650, optional: 1060, RGB. Special order: 1310 nm nm
Retro-reflector for alignment	$\varnothing 64$ mm, N.W 280 g Thread $\varnothing 16$ mm, <5"
Min. Focusing Distance	Focused at Infinity
Built in coarse aiming Laser Pointer	638 nm power <1.0 mW Class 2 laser product, IEC60825-1

Spectral Response	350 - 1310 nm (Telescope Mode)
Resolution (H x V pixels)	1920 x 1200
Gain Control	x24
Dynamic Range	60 dB , 12 bit
Exposure Speed	39 μ sec to 20 sec
Frame Rate	40 fps (8 bit)
Pixel Size	5.86 μ m x 5.86 μ m
Pixel Bit Depth	8/12 bits
Background Subtraction	User activated
Trigger	<ul style="list-style-type: none"> • Internal Software • Hardware Falling or Rising Edge • Trigger Delay 0.015ms - 4.0 sec
Pan & Tilt knobs	Tilt $\pm 2^{\circ}$, Pan $\pm 2.5^{\circ}$
Power Requirements	~ 2 Watt (Via USB 3.0 interface)
Dimensions (L x W x H) in mm	205 x 92 x 158
Weight (typical)	3.7 kg
Min. Hardware Requirements	CPU i3 1.6 GHz, 4 GB RAM Min. Resolution 1366 x 766
Interface	USB 3.0, Windows 7/8/10 (32 & 64 bit)
Operating Temperature	0 $^{\circ}$ - 35 $^{\circ}$ C

Ordering Information

Model EAC-FOV: Complete system including a collimator unit with USB 3.0 camera, cable, retroreflector for infinity adjustment, application software on Flash Drive, carrying case.

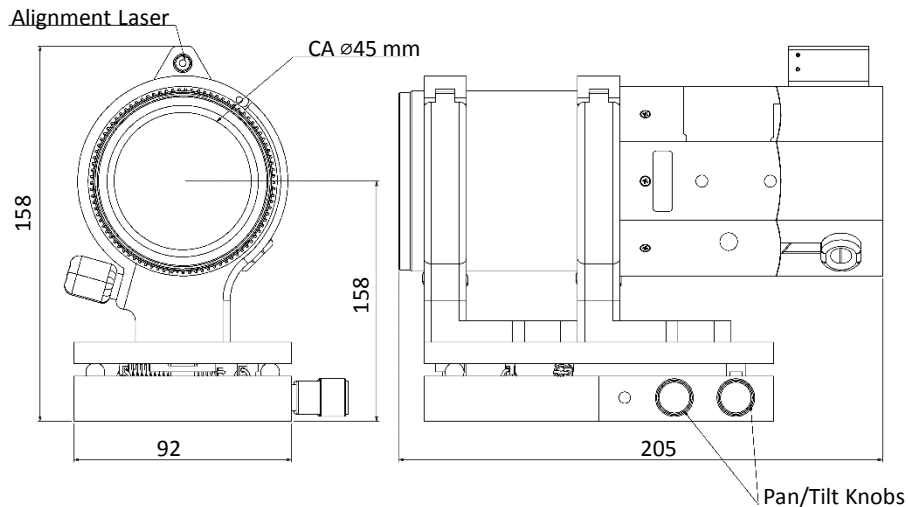

Dimensions are in mm.

DUMA OPTRONICS LTD.



海纳光学有限公司
HIGHLIGHT OPTICS CO., LTD.

Tel: 0755-84870203 www.highlightoptics.com
E-mail: sales@highlightoptics.com