



## Featuring Large Optical Aperture

#### Applications

- Measure position deviations over long distances
- Monitoring low frequencies displacements, including buildings and bridges
- Fence polls alignment
- Track straightness

#### Main Features

- Large Aperture For long distance or large movement alignment
- Extremely accurate Less than 1% edge-to-edge and 30 mm resolution for minute movements
- Versatile Measures beam position (up to 3 beams simultaneously), measures both CW and pulsed beams
- Easy to use User friendly software with on-line Help routine, P&P camera with USB2.0 interface

### **DUMA OPTRONICS LTD.**




Tel: 0755-84870203 www.highlightoptics.com E-mail: sales@highlightoptics.com

## Specifications

Detection size	X=100mm, Y=80mm
Dimensions	185mm(L) x185mm(H) x91mm(W)
Mechanics	Rugged water resistant Aluminum housing
Mounting	Tripod mount UNC 1/4 - 20
Weight	1350 gr
Frame rate	30 Hz
Spectral response	400 – 800 nm
Position accuracy	Less than 1% Edge-to-edge
Position resolution	30 um
Interface	High Speed USB2.0
Cable	100 cm USB2.0 cable attached to camera, (2.5m cable extension - optional)
Power	Powered by USB port
Input power level	About 2.5mW at 650nm (consult factory about attenuation)

#### Mechanical drawing



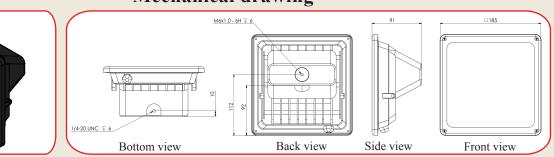

### **Software Features**

- Centroid calculation and display
- 3 regions of interest for simultaneous measurements of up to 3 beams
- 2D contour map of beam in real time
- Direct data logging to Excel files with detailed statistics
- Data exporting to another computer via RS232
- Average
- Automatic Pass/Fail analysis report
- ActiveX package to control software from your application

# Hardware Requirements

The recommended host computer requirements are: Intel Core 2 quad ,Windows XP/7/8/10, 1 G DDRZ, 1GB disk space, 2.83 GH 31 free high speed USB2.0 port, CD ROM drive



## **Ordering Information**

SPOTON-LA – System comprises of a Plug & Play camera with USB2.0 interface and attached cable, software on CD disk.

### DUMA OPTRONICS LTD.

