

# CERES T 640 SERIES

## LWIR thermographic camera

- Compact and uncooled LWIR thermographic camera
- Microbolometer detector with 640x480 resolution and 12  $\mu\text{m}$  pixel pitch



## COMPACT, HIGH-PERFORMANCE THERMOGRAPHIC CAMERA

The Cerēs T 640 series is based upon the Dione 640 OEM thermal imaging core with 640x480 pixels and 12  $\mu\text{m}$  pixel pitch. The camera offers superior on-board thermographic performance (accuracy, stability) in the temperature range up to 400°C.

The Cerēs T 640 camera outputs full frame images at 60 Hz via either a CameraLink or GigE Vision interface.


The compact size, excellent thermographic stability and accuracy, and GenICam compliant interfacing allow for easy integration in demanding industrial thermography applications. The camera comes with two different HFOV (Horizontal Field-Of-View) options: 24 and 50 degrees.

## DESIGNED FOR USE IN


- Process Monitoring
- Medical
- Scientific & Advanced Research

## ADVANTAGES


- Compact size
- Superior on-board thermographic performance (stability, accuracy)
- Temperature measurements up to 400°C
- Frame rate up to 60 Hz
- Low latency synchronization

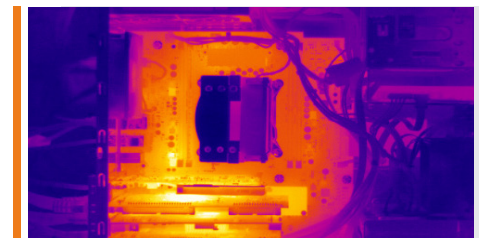

PCB Inspection

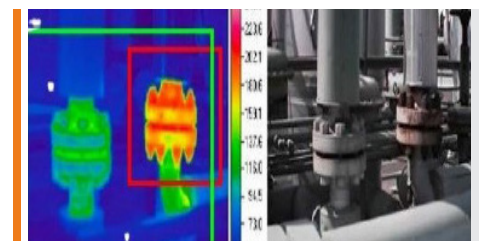

Thermal imaging

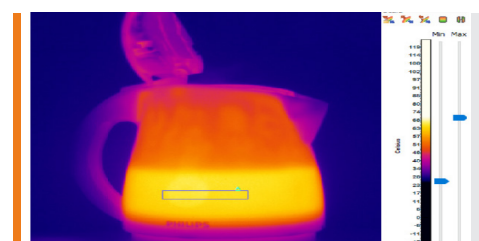

Thermography

## SPECIFICATIONS

Camera Specifications	Ceres T 640 CL	Ceres T 640 GigE
<b>Mechanical specifications</b>		
Approximate dimensions - excluding lens [width x height x length] [mm]	45 x 45 x 67	45 x 45 x 75
Approximate lens dimensions [diameter x length] [mm]	28 x 23 [Ceres T 640 24]; 32 x 30 [Ceres T 640 50]	
Weight [gr] - including lens	224 [Ceres T 640 24 CL]; 242 [Ceres T 640 50 CL]	231 [Ceres T 640 24 GigE]; 249 [Ceres T 640 50 GigE]
HFOV [°]	25 [Ceres T 640 24]; 50 [Ceres T 640 50]	
Minimum working distance [mm]	1500 [Ceres T 640 24]; 500 [Ceres T 640 50]	
Optical interface	M24 x 0.5 [Ceres T 640 24, Ceres T 640 50]	
Connector GigE	-	RJ45
Connector CameraLink	SDR -26	-
Connector power	Unified Connector (Lemo 1B)	
Connector trigger	Unified connector (Lemo 1B)	
Connector I/O	Unified Connector (Lemo 1B)	
<b>Environmental &amp; power specifications</b>		
Ambient operating temperature range [°C]	From -40 to +70	
Ambient operating temperature for thermography [°C]	From +10 to +35	
Storage temperature [°C]	From -40 to +85	
Power consumption [W]	3.5	4
Power supply voltage	DC 12 V	
Shock	40 g, 11 ms, MIL-STD810G	
Vibration	5 g [20 to 2000 Hz], MIL-STD810G	
IP rating	IP40	
Regulatory compliance	RoHS	
<b>Electro-optical specifications</b>		
Image format [pixels]	640x480	
Pixel pitch [µm]	12	
Detector type	Microbolometer	
Integration type	Rolling shutter	
Active area and diagonal [mm]	7.68 x 5.76 (diagonal 9.6)	
Detector NETD [Noise Equivalent Temperature Difference] [mK]	<60 (at 30Hz, 300K, F/1)	
Spectral range [µm]	8-14	
Pixel operability	>99.5% (excluding 3 peripheral rows and columns)	
Max frame rate [Hz] [full frame]	60	
Integration time range [µs]	20 - 65 [recommended]	
Min region size [pixels]	80 x 80	
Analog-to-Digital [ADC] [bits]	16	
Command and control	CL	GigE
Digital output format	CL	GigE
Trigger	Unified Connector (Lemo 1B)	
<b>Thermography</b>		
Calibration pack 1 [°C]	From -20 to +120	
Calibration pack 2 [°C]	From +50 to +400	
Temperature measurement accuracy	Either +/- 2 °C or +/- 2%, whichever is greatest	
Operating temperature range [housing temperature] [°C]	+10 to +35	
<b>Product selector guide</b>		
Part number	XEN-000726 [Ceres T 640 24 CL]	XEN-000723 [Ceres T 640 24 GigE]
	XEN-000682 [Ceres T 640 50 CL]	XEN-000681 [Ceres T 640 50 GigE]

XDS027-03 | Information furnished by Xenics is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are typical values and subject to change without notice. This information supersedes all previously supplied information.



For more information on our products  
Please scan the QR code.

[www.xenics.com](http://www.xenics.com) | [www.sinfrared.com](http://www.sinfrared.com)

**Xenics**  
Infrared Solutions  
ISO 9001:2015