




UV - VISIBLE


EC2: EN207 Certified. Luminous transmittance: 93% Clear. \$90/pair.

λ [nm]	OD	λ [nm]	L-Rating
190-398	7+	190-315	D LB7 + IR LB4
9000-11000	7+	>315-398	DIRM LB5
		9000-11000	DI LB3

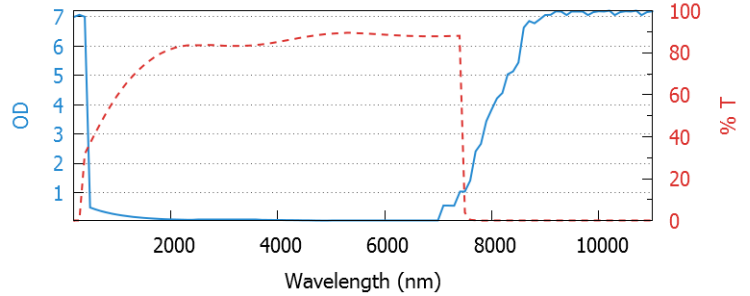


EC3: EN207 Certified. Luminous transmittance: 90% Clear. \$150/pair.

λ [nm]	OD	λ [nm]	L-Rating
190-380	5+	190-315	D LB7 + IR LB3
9000-11000	7+	>315-375	DIRM LB5
		9000-11000	DI LB4

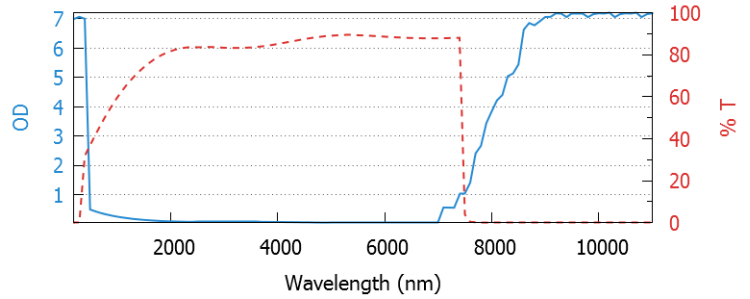


BD1: EN207 Certified. Luminous transmittance: 66% Plum. \$165/pair.

λ [nm]	OD	λ [nm]	L-Rating
190-410	5+	190-315	D LB7 + IR LB4
		>315-410	DIRM LB5

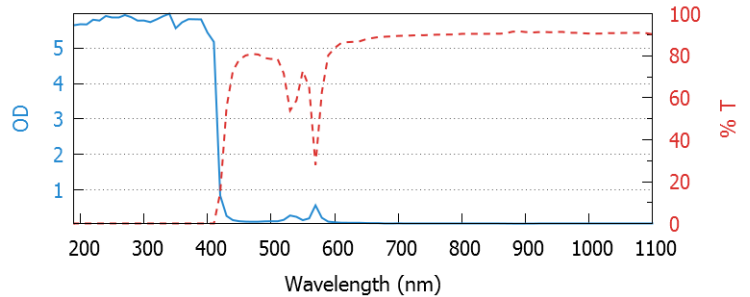

YLW: EN207 Certified. Luminous transmittance: 73% Yellow. \$130/pair.


λ [nm]	OD	λ [nm]	L-Rating
190-450	6+	190-315	D LB8 + IR LB4
>450-460	5+	>315-460	DIR LB5

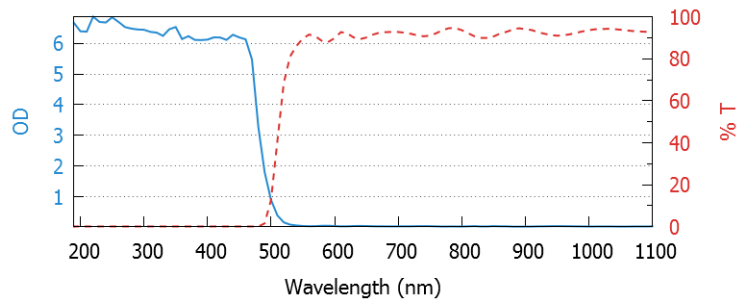

KT2: Luminous transmittance: 39% Pink. \$185/pair.

λ [nm]	OD
525-540	5+
532-535	7+


λ [nm]	L-Rating
	Pending

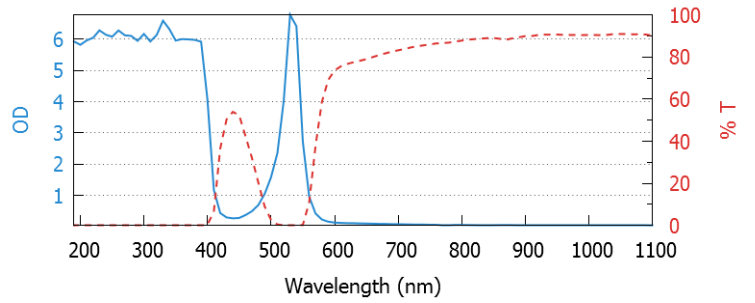

KTP: EN207 Certified. Luminous transmittance: 34% Red. \$195/pair.

λ [nm]	OD
190-435	5+
523-535	5+
532	6+


λ [nm]	L-Rating
190-435 + 523-535	DIRM LB5
532	DIRM LB6

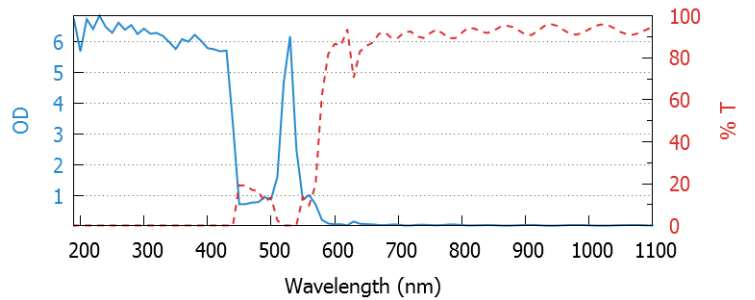

AG4: EN207 Certified. Luminous transmittance: 45% Topaz. \$165/pair.

λ [nm]	OD
190-400	5+
520-535	3+
532	4+


λ [nm]	L-Rating
532	DIR LB4
520-535	DIR LB3

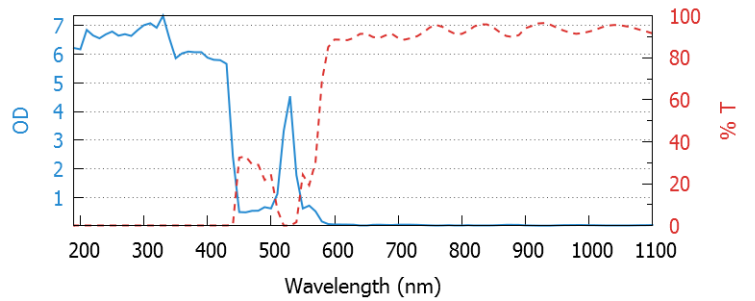

ARG: EN207 Certified. Luminous transmittance: 48% Orange. \$100/pair.

λ [nm]	OD
180-532	7+

λ [nm]	L-Rating
180-315	D LB7 + IR LB4
>315-532	DIRM LB6

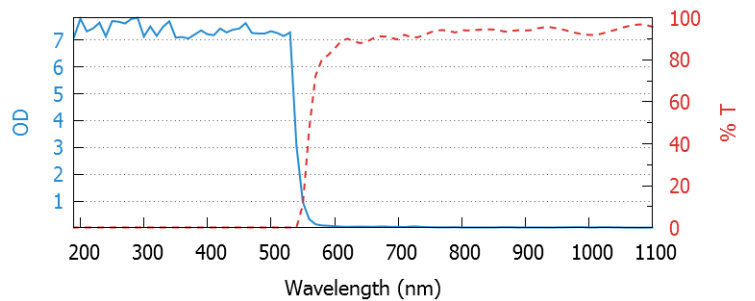

ELP: Luminous transmittance: 13% Red. \$190/pair.

λ [nm]	OD
190-425	5+
514-545	4+
532	6+

λ [nm]	L-Rating
	Pending

