


PN: DS-285-U-Y-A

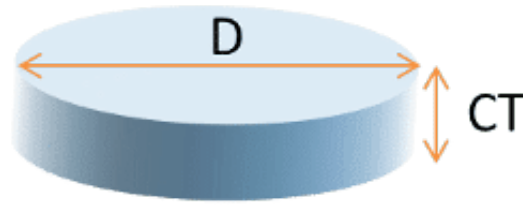

Input Parameters

Wavelength [nm]:	355
Beam Mode (SM/MM):	SM or MM
Minimum Beam Diameter [mm]:	>0.22

Element Parameters

Element Type:	Window
Material:	Fused Silica
Element Size [mm]:	25.4
Clear Aperture [mm]:	20
Thickness [mm]:	3
Coating:	AR/AR coating

Output Parameters

Number of Spots:	2
Separation Angle [deg]:	0.54
f [deg]:	0.54
Transmission efficiency:	Close to 100%
Overall Efficiency:	~ 94%
Uniformity (Contrast) [%]:	Alignment dependent
Zero-Order relative to the incident beam [%]:	<1
Remarks	High Efficiency (CV HEDS)

