


PN: DS-288-U-Y-A

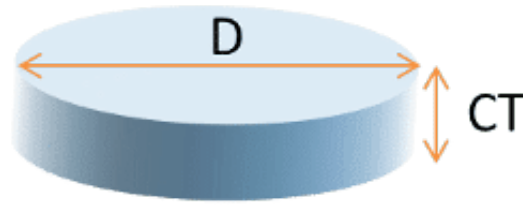

Input Parameters

Wavelength [nm]:	355
Beam Mode (SM/MM):	SM or MM
Minimum Beam Diameter [mm]:	>0.31

Element Parameters

Element Type:	Window
Material:	Fused Silica
Element Size [mm]:	11
Clear Aperture [mm]:	7
Thickness [mm]:	3
Coating:	AR/AR coating

Output Parameters

Number of Spots:	2
Separation Angle [deg]:	0.40
f [deg]:	0.40
Transmission efficiency:	Close to 100%
Overall Efficiency:	~ 95%
Uniformity (Contrast) [%]:	Alignment dependent
Zero-Order relative to the incident beam [%]:	<2
Remarks	High Efficiency (CV HEDS)

