


PN: MS-216-I-Y-A

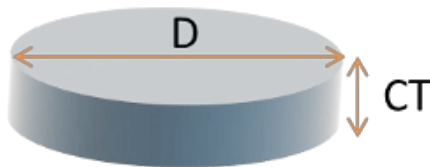

INPUT PARAMETER

Wavelength [nm]:	1064
Beam Mode (SM/MM):	SM or MM
Minimum Beam Diameter [mm]:	>0.26

ELEMENT PARAMETER

Element Type:	Window
Material:	Fused Silica
Element Size [mm]:	11
Clear Aperture [mm]:	9.2
Thickness [mm]:	3
Coating:	AR/AR coating

OUTPUT PARAMETER

Number of Spots:	4 x 4
Separation Angle [deg]:	1.39 x 1.39
θ_f [deg]:	4.16 x 4.16
Transmission efficiency:	Close to 100%
Overall Efficiency:	~ 75%
Uniformity (Contrast) [%]:	<2
Zero-Order relative to the incident beam [%]:	<1.5

