


PN: MF-006-I-Y-A

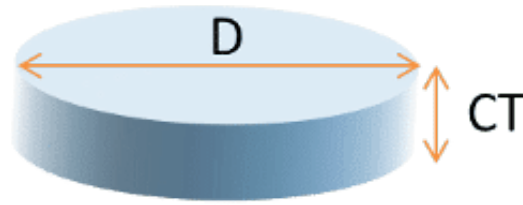

### Input Parameters

Wavelength [nm]:	1064
Beam Mode (SM/MM):	SM or MM
Minimum Beam Diameter [mm]:	>4.2

### Element Parameters

Element Type:	Window
Material:	Fused Silica
Element Size [mm]:	11
Clear Aperture [mm]:	9.2
Thickness [mm]:	3
Coating:	AR/AR coating

### Output Parameters

Transmission efficiency:	Close to 100%
Overall Efficiency:	~ 81%
EFL of external lens [mm] (not supplied):	20
Refractive index of foci medium:	1.00
Average separation between foci [um] in foci medium:	610.4
Distance between first to last foci [um] in foci medium:	8545.1

### Separation between foci in foci medium [um]:

413.0	434.1	456.8	481.3	507.9	536.8	568.2	602.4	639.8	680.8	725.9	775.7	830.7	891.7
-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

Holo/Or can optimize the parameters of this product per your requirements. [Contact us](#)