
BeamOn HR 4/3"



Innovative 47 MP (**19.1 x 13 mm**) Beam Profiler with enhanced sensitivity at NIR, exceeding 1350 nm Multiple active areas for multi beam analysis

Versatile – Measures Profile, Power and Position

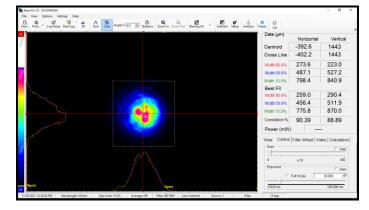

Specifications

Laser Type	CW & Pulsed		Min. P
Beam width resolution	1 micron or better		Exposu
Max. Resolution (H x V pixels)	8288 x 5644		Access
Beam Size Elliptical Beams		Ø25 μm - Ø12.5 mm Ø25 μm - 12.5x18.5 mm	
Spectral Response	350 – 1600 nm (VIS NIR)		Power
Sensor Active Area (mm)	Diagonal 23.2 mm 19.1 x 13, sensor can be divided into multiple active areas, working in parallel for up to 400 sectors (NEW)		Housin
			Weight
			Min. H
Gain Control	Up to 570		
ADC Dynamic Range	16 bit		Interfa
Shutter Speed	Shutter - 32 µsec to 2 sec		Mecha
Wavelength		633	
Saturation		20 μW/mm²	
Sensitivity		Better than 1 nanoW/mm ²	

Min. Pixel Size	2.3 μm x 2.3 μm			
Exposure Control	Programmable via GUI			
Accessories	-IR Edge Filter -C-Mount Filter			
Power Supply	~10 Watt , 5V 3A			
Housing Size in mm	Ø62 (see drawing)			
Weight (typical)	300 gr.			
Min. Hardware Requirements	CPU i3 1.6 GHz, 4 GB RAM			
Interface – USB 3.0	Windows 8/10/11			
Mechanical Interface	Post mounting: M4 Optical attachments & filters: C-mount			
980		1310		

Ordering Information

BEAMON-4/3": The system consists of a camera, cable, mounting post, carrying case, ND1000 Filter, software on a CD/Flash Drive.



DUMA OPTRONICS LTD.

海纳光学


电话: 0755-84870203 网址: www.highlightoptics.com

 $100 \,\mu\text{W/mm}^2$

Better than 1 nanoW/mm²

0.2 W/mm²

 $20 \,\mu W/mm^2$

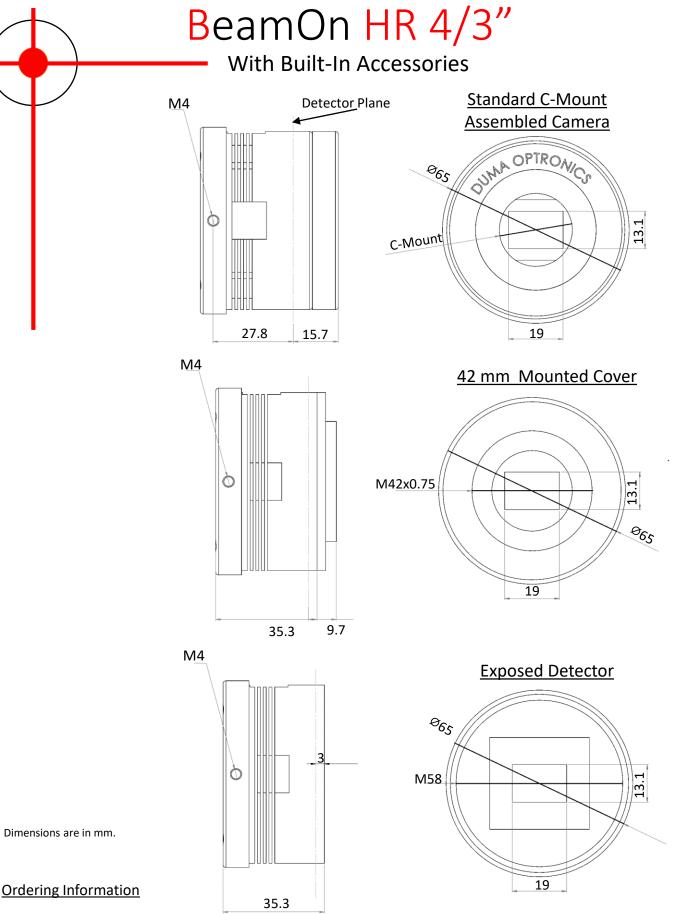

BEAMON-4/3": The system consists of a camera, cable, mounting post, carrying case, ND1000 Filter, software on a CD/Flash Drive.

DUMA OPTRONICS LTD.