



Electronic Autocollimator LA-100

A precise USB 3.0 Autocollimator combining the functionality of Autocollimation with a large input aperture of 100 mm



- High resolution of down to 0.01 arc sec or 0.05 μ rad, with clear aperture exceeding 100 mm.
- Built-in computer controlled laser pointer for easy alignment.
- Built-in Pan & Tilt adjusting mechanics.
- Hybrid autocollimator fusing together alignment & beam analysis.

Specifications

FoV Autocollimator	$\pm 17.2'$ (H) x $\pm 10.3'$ (V) ± 5 (H), ± 3 (V) [mrad]	Gain Control	1x – 24x
FoV Telescope & Beam Profiler	$\pm 34.4'$ (H) x $\pm 20.6'$ (V) ± 10 (H), ± 6 (V) [mrad]	Dynamic Range	60 dB, 12 bit
Clear Aperture	100 mm	Exposure Speed	39 μ sec to 20 sec
Autocollimator's Resolution	0.01 sec	Frame Rate	30 fps – up to 550 fps@ fast mode (NEW)
Autocollimator's Accuracy	0.5 sec	Pixel Size	5.86 μ m x 5.86 μ m
Light Source	LED- 650 Optional: 1060, RGB.	Background Subtraction	User activated
Retro-reflector for alignment	$\varnothing 64$ mm, N.W 280 g Thread $\varnothing 16$ mm, <5"	Objective Aperture	M72 x 0.75 mm
Min. Focusing Distance	Focused at Infinity	Trigger	• Internal Software • Hardware Falling or Rising Edge • Trigger Delay 0.015ms - 4.0 sec
Built in coarse aiming Laser Pointer	638 nm power <1.0 mW Class 2 laser product, IEC60825-1	Pan & Tilt knobs	Tilt $\pm 2^\circ$, Pan $\pm 2.5^\circ$
Spectral Response	350 - 1100 nm (Telescope Mode)	Power Requirements	~2 Watt (Via USB 3.0 interface)
Resolution (H x V pixels)	1920 x 1200 sensor can be divided into multiple active areas, working in parallel for up to 400 sectors (NEW)	Dimensions (L x W x H) in mm	635 x 184 x 208
		Weight (typical)	5 kg
		Min. Hardware Requirements	CPU i3 1.6 GHz, 4 GB RAM Min. Resolution 1366 x 766
		Interface	USB 3.0, Windows 7/8/10 (32 & 64 bit)
		Operating Temperature	0° – 35° C
		Laser Alignment Accessory	Offsetting alignment laser to coincide with aperture center

Ordering Information

EAC-LA100: Complete system including a collimator unit with USB3.0 CCD camera, software on CD/Flash and a retro-reflector for infinity adjustment.

Accessories

LAA-65: Offsetting laser device.


DUMA OPTRONICS LTD.

Website: <http://www.dumaoptronics.com>

E-mail: sales@duma.co.il





April 2022



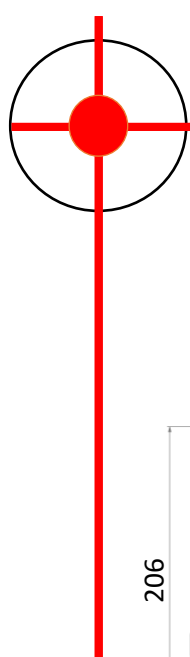

Electronic Autocollimator LA-100

A precise USB 3.0 Autocollimator combining the functionality of Autocollimation with a large input aperture of 100 mm

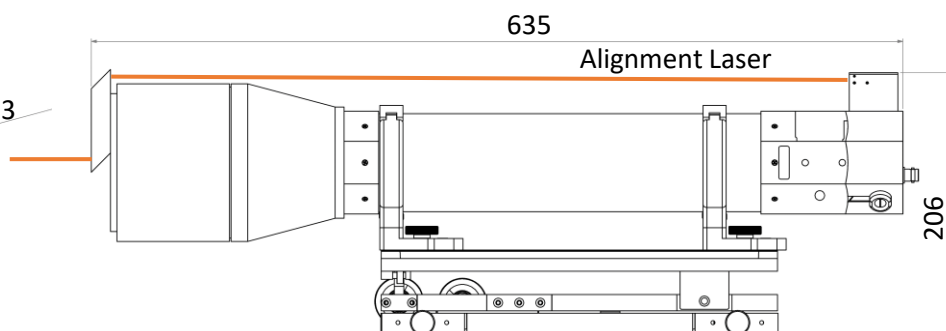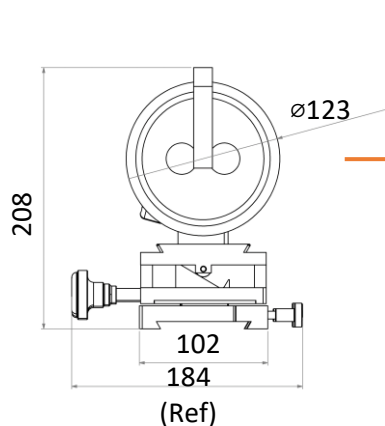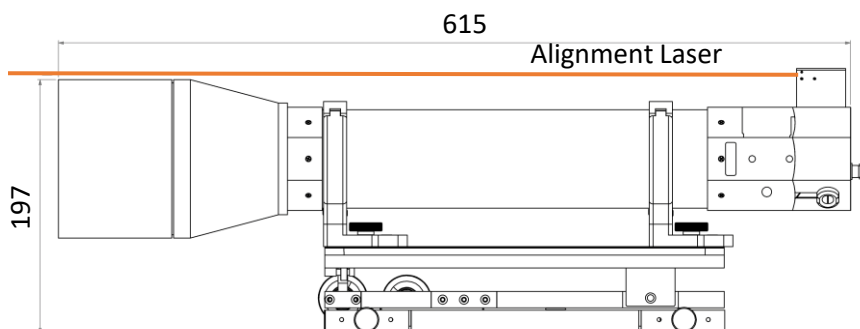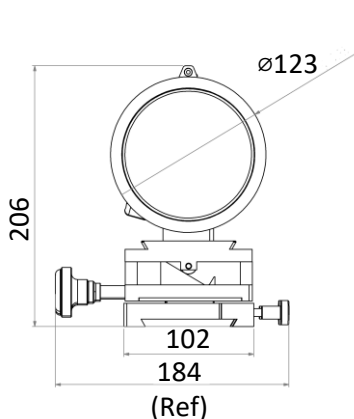

Dimensions are in mm.

DUMA OPTRONICS LTD.

Website: <http://www.dumaoptronics.com>

E-mail: sales@duma.co.il

April 2022

