

High-Energy Picosecond Laser

PICOPOWER™-RG1-1064-10K



The **PICOPOWER™-RG1-1064-10K** picosecond laser delivers ultra-short pulses with high energy, high peak and average power at 1064 nm wavelength with variable repetition rates from single shot to 10 kHz. It features a unique synchronization capability with unsurpassed 3.5 ps jitter for pulses on demand. Optional wavelengths at 532 nm, 355 nm and 266 nm are available collinearly or as multiple output beams. The distinctive features of this laser are excellent power, pulse-to-pulse and beam pointing stability, diffraction-limited output beam, pulse-on-demand triggering and peak power of more than 2 MW with less than 30 W electrical power consumption. It is an ideal choice for numerous applications, including micro-machining of metal and non-metal materials, semiconductor wafer inspection, carving, nonlinear optics, ultrafast spectroscopy and many others.

Features

- Single or multiple outputs at **1064 nm, 532 nm, 355 nm or 266 nm** wavelengths
- Unsurpassed **3.5 ps rms jitter** to external trigger
- Less than **30 ps** pulse width
- **50 µJ** pulse energy at 1064 nm
- More than **2 MW** peak power at 1064 nm
- Internal and external trigger
- Air-cooled, compact and cost effective
- Excellent Gaussian TEM_{00} beam profile
- Variable repetition rate

Applications

- High-speed and precision micro-machining (glass, silicon, plastics, etc.)
- Fluorescence lifetime measurements
- Multi-photon non-linear microscopy
- Marking, carving and 3D engraving
- Time-resolved spectroscopy
- Terahertz imaging
- Nonlinear optics

Technical Specifications: Typical Values

OPTICAL and ELECTRICAL CHARACTERISTICS

Parameter	Unit	Fundamental	Harmonics (optional)		
Wavelength	nm	1064	532	355	266
Pulse Energy, single shot to 5 kHz	μJ	55	33	16	12
Pulse Energy @ 10 kHz	μJ	50	29	13.5	10
Pulse Width, single shot to 10 kHz	ps	< 30	< 30	< 25	< 25
Peak Power, single shot to 5 kHz	MW	2.3	1.7	0.9	0.7
Peak Power @ 10 kHz	MW	2.1	1.4	0.8	0.6
Average Power @ 10 kHz	mW	500	290	135	100
Long Term Power Stability (8 hrs)	%, rms	< 1.0	< 2.0	< 3.0	< 4.0
Pulse-to-Pulse Energy Stability	%, rms	< 1.0	< 2.0	< 3.0	< 4.0
Beam Diameter, 1/e ²	mm	1.4	Available on request		
Polarization (linear)	%	> 99.5	> 99.9	> 99.9	> 99.9
Beam Divergence	mrad	< 1.2	< 2.0	< 3.0	< 3.0
Beam Pointing Stability (rms)	μrad	< 30	< 30	< 30	< 30
Pre-Pulse Contrast Ratio ¹⁾		> 10 ³ : 1	> 10 ⁵ : 1	> 10 ⁷ : 1	> 10 ⁹ : 1
Post-Pulse Contrast Ratio ¹⁾		> 10 ² : 1	> 10 ³ : 1	> 10 ⁵ : 1	> 10 ⁷ : 1
Spatial Mode / M ²		TEM ₀₀ / M ² < 1.2		TEM ₀₀ / M ² < 1.5	
Repetition Rate	kHz	Single shot to 10 kHz			
Internal Trigger Repetition Rate	kHz	0.1 ... 10			
External Trigger Repetition Rate	kHz	Single shot to 10 kHz			
External Trigger Specifications		TTL (4.5 ... 5.5 V on 50 Ω load) Rising edge: < 10 ns; Pulse width: min. 250 ns, max. 1.3 μs			
Delay of Laser Pulse to TRIG IN	ns	~ 500			
Optical SYNC OUT Pulse	ps	Optional, jitter < 1 ps, rise time < 50 ps			
Electrical SYNC OUT Pulse		+5 V on 50 Ω load			
Jitter of Laser Pulse to External Trigger	ps, rms	3.5			
Delay SYNC OUT to Laser Pulse	ns	Adjustable from -100 to +1000			
Jitter of Electrical SYNC OUT Pulse	ps	50			

MECHANICAL CHARACTERISTICS

	Dimensions	Weight
Laser Head	165 x 95 x 700 mm ³	10 kg
Laser Diode Driver	130 x 65 x 105 mm ³	1 kg
Control Unit	105 x 65 x 105 mm ³	1 kg

GENERAL CHARACTERISTICS

Power Requirements	+12 V DC, 5 A or 100 ... 240 VAC with AC/DC adapter
Power Consumption	< 30 W
Operating Temperature Range	15°C – 35°C
Cooling	Passive (convection)
Typical warm-up time	< 15 min
Beam height	Min. 93 mm, max. 103 mm, adjustable

Note: ¹⁾ Peak-to-peak with respect to residual pulses.



海纳光学


电话: 0755-84870203

网址: www.highlightoptics.com


LASERS, OPTICS, ELECTRONICS
MADE IN GERMANY
WWW.ALPHALAS.COM




Performance of PICOPOWER™-RG1-1064-10K: Typical Values

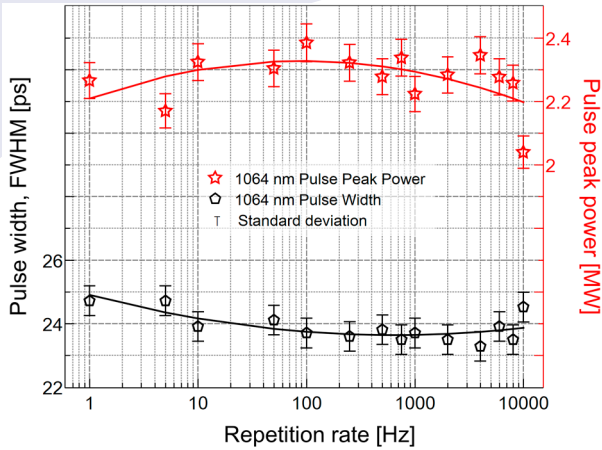


Pulse width and peak power at different repetition rates for 1064 nm wavelength.

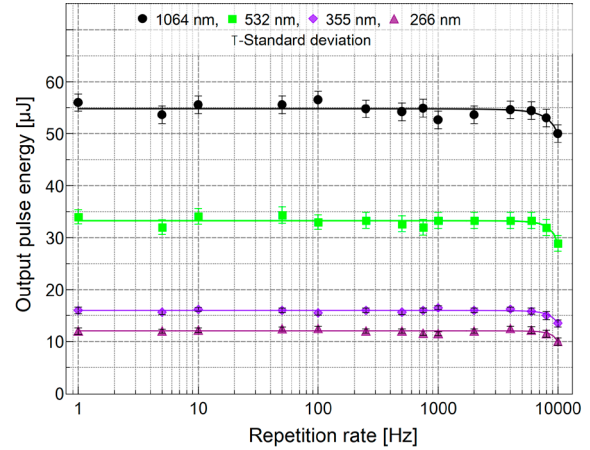


Pulse energy at different repetition rates for 1064, 532, 355 and 266 nm wavelengths.

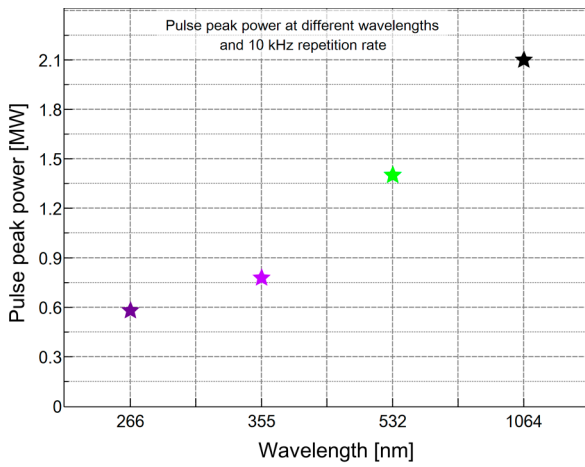


Peak power at 1064 nm and its harmonic wavelengths at 10 kHz repetition rate.

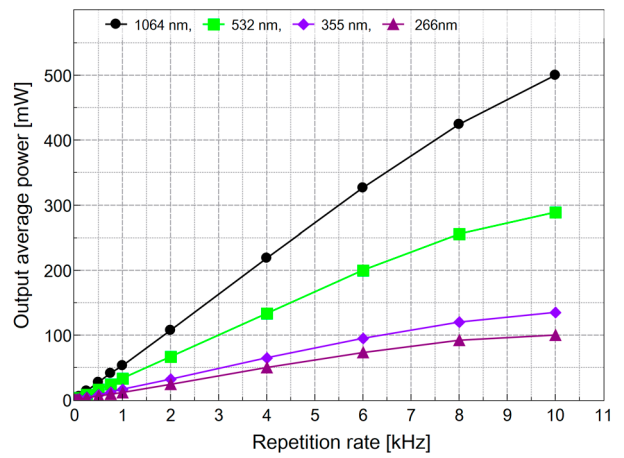

Average power at different repetition rates for 1064, 532, 355 and 266 nm wavelengths.

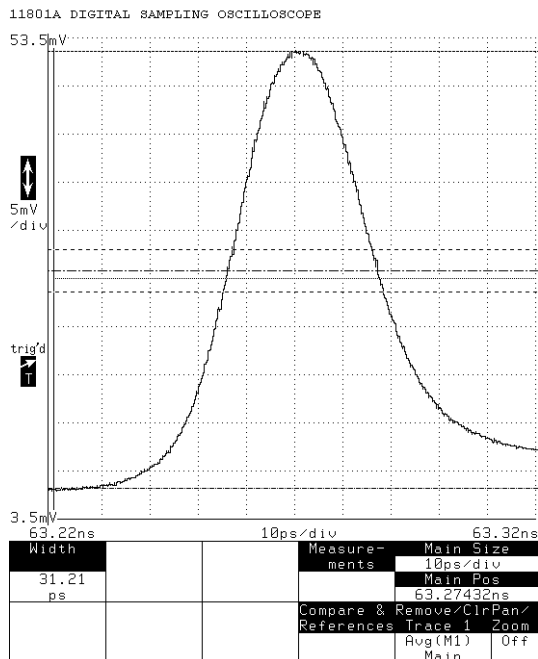


Pulse width at 1064 nm wavelength before deconvolution measured with 30 GHz photodetector.

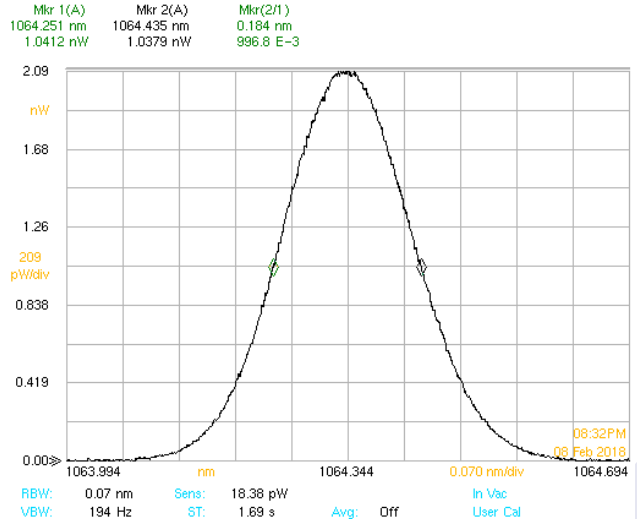


Spectral bandwidth at 1064 nm wavelength.



Performance of PICOPOWER™-RG1-1064-10K: Typical Values

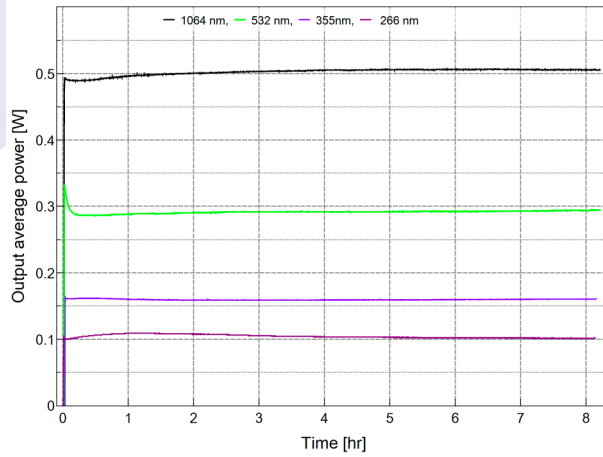



Long-term power stability at 1064 nm wavelength.

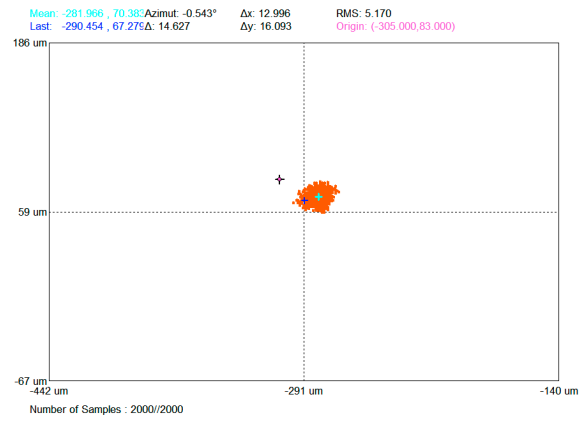


Beam pointing stability at 10 kHz repetition rate.

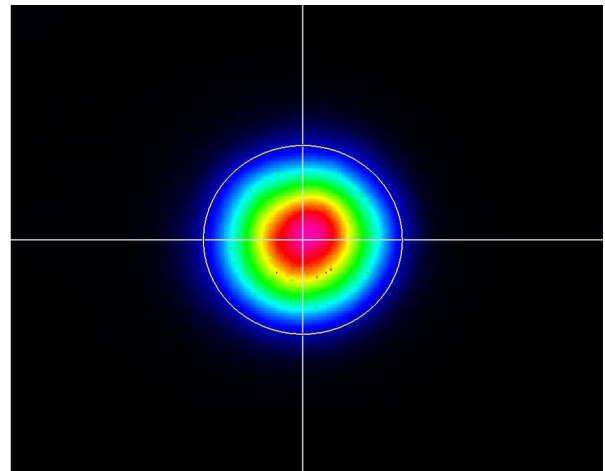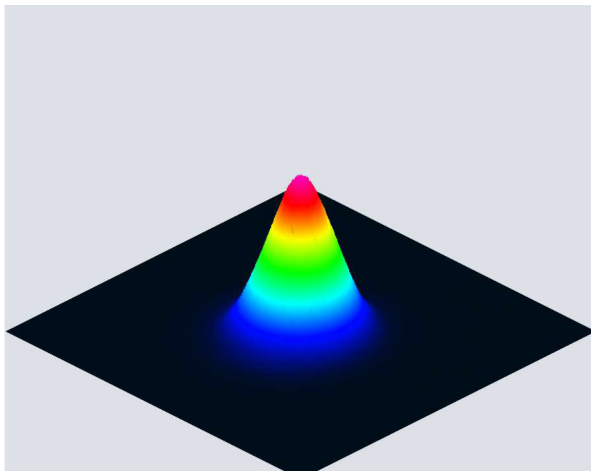

3D and 2D far-field beam profile measured at 540 mm distance from laser head for 1064 nm wavelength.

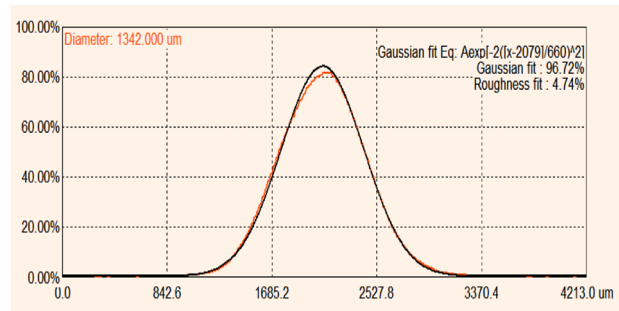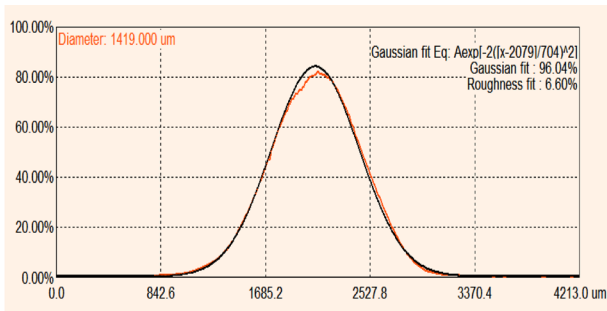

1D cross section and Gaussian fit showing nearly 95% overlap.

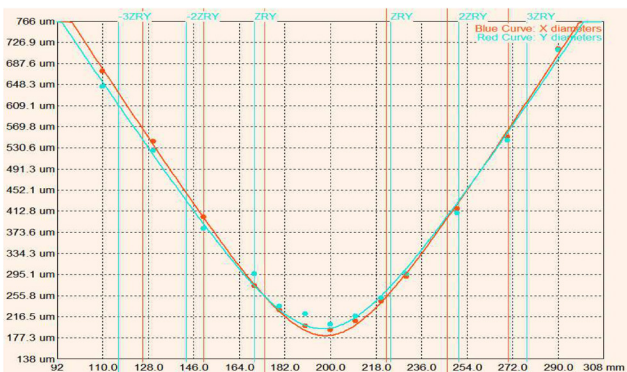

Beam quality measured at maximum output power according to ISO 11146 standard ($\pm 5\%$).


$$M^2_{\text{eff}} = 1.02$$

$$\text{Div}_{\text{eff}} = 0.93 \text{ mrad}$$


$$\text{BPP}_{\text{eff}} = 0.34 \text{ mrad} \cdot \text{mm}$$

$$z0_{\text{eff}} = 1551 \text{ mm}$$


Outline Drawings of PICOPOWER™-RG1-1064-10K



Front View

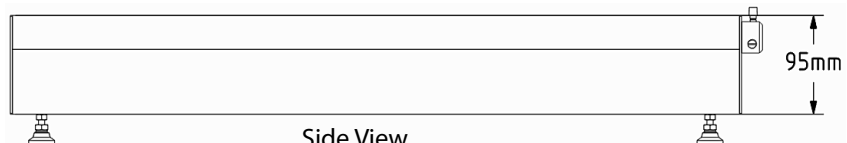


Side View

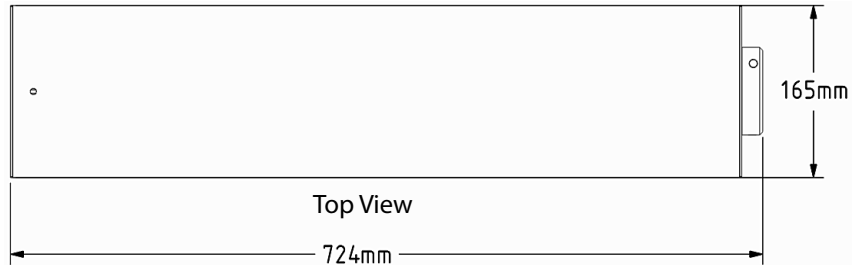


Top View


Outline Drawings of PICOPOWER™ Laser Diode Driver and Control Unit

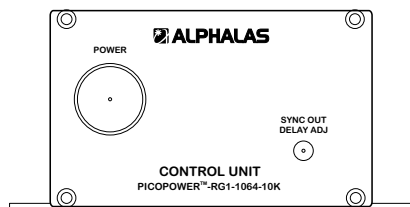


Control Unit
Front View

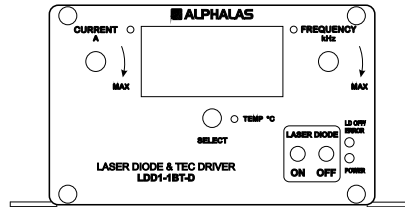


Laser Diode Driver
Front View

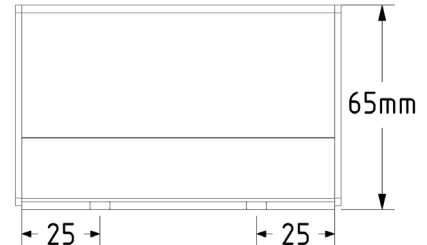


Side view

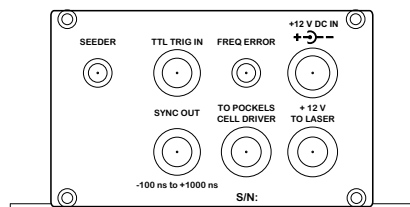

Control Unit
Back View

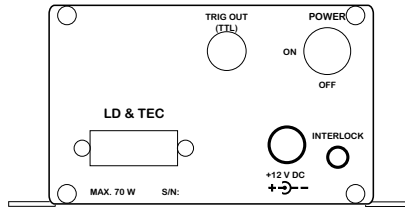

Laser Diode Driver
Back View

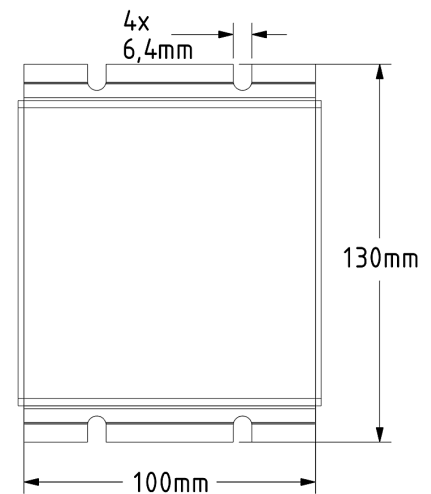

Top view



**DANGER – VISIBLE AND INVISIBLE
LASER RADIATION
AVOID EYE OR SKIN EXPOSURE TO
DIRECT OR SCATTERED RADIATION
CLASS 4 LASER PRODUCT
IEC / EN 60825-1**

ALPHALAS GMBH
Bertha-von-Suttner-Str. 5
D-37085 Göttingen
Germany

电话: 0755-84870203
网址: www.highlightoptics.com

LASERS, OPTICS, ELECTRONICS
MADE IN GERMANY
WWW.ALPHALAS.COM



Options and further specifications are available upon request. Specifications in this data sheet are subject to change without notice. No responsibility for typing or printing errors. ALPHALAS GmbH reserves the right to make changes without further notice to any products herein. ALPHALAS GmbH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ALPHALAS GmbH assume any liability arising out of the application or use of any product, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in ALPHALAS GmbH data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. ALPHALAS GmbH products are intended for expert users only. ALPHALAS GmbH products are not designed, intended, or authorized for use in medical, surgical or any other human *in vivo* applications, or for any other application in which the failure of the ALPHALAS GmbH product could create a situation where personal injury or death may occur. Therefore, ALPHALAS GmbH products must not be used in such applications. Furthermore, ALPHALAS GmbH products must not be used in critical applications (e.g. in life support systems, in aviation, in nuclear facilities, in weapon systems, in safety or security systems, etc.). ALPHALAS GmbH products must not be used where damage to property may occur.