



# Datasheet

# HSA-X-S-2G-IN

## Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode



The picture shows model HSA-X-S-2G-IN-FS. The photoreceiver will be delivered without post holder and post.


### Features

- InGaAs-PIN photodiode
- Bandwidth 10 kHz – 2 GHz
- Amplifier transimpedance gain  $5.0 \times 10^3$  V/A
- Max. conversion gain  $4.75 \times 10^3$  V/W @ 1550 nm
- Spectral range 900 – 1700 nm
- Free-space input 1.035"-40 threaded, alternatively 25 mm diameter unthreaded
- UNC 8-32 and M4 tapped holes for mounting on standard posts with metric and imperial thread

### Applications

- Spectroscopy
- Ultra-fast pulse and transient measurements
- Optical triggering
- Optical front-end for oscilloscopes and ultra-fast A/D converters

### Block Diagram

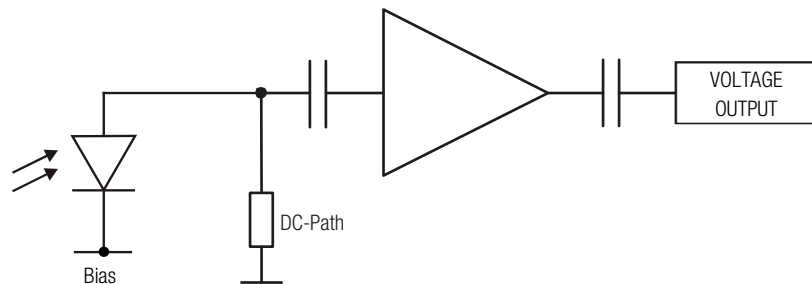

BS01-HSA-X-S\_R01



# Datasheet

# HSA-X-S-2G-IN

## Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode

### Available Versions

HSA-X-S-2G-IN-FST


1.035"-40 threaded flange for free space applications. Compatible with many optical standard accessories .



Picture shows 1.035"-40 threaded flange with internally threaded coupler ring (outer diameter 30 mm)

HSA-X-S-2G-IN-FS

25 mm dia. unthreaded flange for free space applications. Compatible with many optical standard accessories.



Picture shows unthreaded flange with 25 mm diameter

HSA-X-S-2G-IN-FC

Fix/permanent FC fiber connector for high coupling efficiency and excellent conversion gain accuracy.



### Related Models

HSPR-X-I-2G-IN-FST

InGaAs-PIN,  $\varnothing$  0.1 mm, 900 – 1700 nm, inverting output free space input, 1.035"-40 threaded flange

HSPR-X-I-2G-IN-FS

InGaAs-PIN,  $\varnothing$  0.1 mm, 900 – 1700 nm, inverting output free space input, 25 mm dia. unthreaded flange

HSPR-X-I-2G-IN-FC

InGaAs-PIN, integrated ball lens, 900 – 1700 nm, inverting output, FC fiber connector (fix/permanent)

HSPR-X-I-1G4-SI-FST

Si-PIN,  $\varnothing$  0.4 mm, 320 – 1000 nm, inverting output free space input, 1.035"-40 threaded flange

HSPR-X-I-1G4-SI-FS

Si-PIN,  $\varnothing$  0.4 mm, 320 – 1000 nm, inverting output free space input, 25 mm dia. unthreaded flange

HSPR-X-I-1G4-SI-FC


Si-PIN, integrated ball lens, 320 – 1000 nm, inverting output, FC fiber connector (fix/permanent)



## Datasheet

## HSA-X-S-2G-IN

## Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode

Related Models (continued)	<p>HSA-X-S-1G4-SI-FST</p> <p>HSA-X-S-1G4-SI-FS</p> <p>HSA-X-S-1G4-SI-FC</p>	<p>Si-PIN, <math>\varnothing</math> 0.4 mm, 320 – 1000 nm free space input, 1.035"-40 threaded flange</p> <p>Si-PIN, <math>\varnothing</math> 0.4 mm, 320 – 1000 nm free space input, 25 mm dia. unthreaded flange</p> <p>Si-PIN, integrated ball lens, 320 – 1000 nm FC fiber connector (fix/permanent)</p>																																				
Available Accessories	<p>PS-15-25-L</p> 	<p>Power supply Input: 100 – 240 VAC Output: <math>\pm</math>15 VDC</p>																																				
Specifications	<table border="0"> <tr> <td data-bbox="231 786 513 884"></td> <td data-bbox="513 786 861 884">Test conditions</td> <td data-bbox="861 786 1473 884"><math>V_S = +15</math> V, <math>T_A = 25</math> °C, output load impedance 50 <math>\Omega</math>, warm-up 20 minutes (min. 10 minutes recommended)</td> </tr> <tr> <td data-bbox="231 884 513 963">Gain</td> <td data-bbox="513 884 861 963">Transimpedance gain Conversion gain</td> <td data-bbox="861 884 1473 963"><math>5.0 \times 10^3</math> V/A (@ output load 50 <math>\Omega</math>) <math>4.75 \times 10^3</math> V/W typ. (@ 1550 nm, output load 50 <math>\Omega</math>)</td> </tr> <tr> <td data-bbox="231 963 513 1041">Frequency Response</td> <td data-bbox="513 963 861 1041">Lower cut-off frequency (–3 dB) Upper cut-off frequency (–3 dB)</td> <td data-bbox="861 963 1473 1041">10 kHz 2 GHz (<math>\pm</math>15%)</td> </tr> <tr> <td data-bbox="231 1041 513 1108">Time Response</td> <td data-bbox="513 1041 861 1108">Rise/fall time (10 % – 90 %)</td> <td data-bbox="861 1041 1473 1108">180 ps (<math>\pm</math>15%)</td> </tr> <tr> <td data-bbox="231 1108 513 1220">Input</td> <td data-bbox="513 1108 861 1220">Noise equivalent power (NEP) Optical saturation power</td> <td data-bbox="861 1108 1473 1220">16 pW/<math>\sqrt{\text{Hz}}</math> (@ 1550 nm, 100 MHz) 200 <math>\mu</math>W AC (for linear amplification, @ 1550 nm) 10 mW CW (to prevent saturation, @ 1550 nm)</td> </tr> <tr> <td data-bbox="231 1220 513 1422">Detector</td> <td data-bbox="513 1220 861 1422">Detector Active area (FS/FST version) Active area (FC version)</td> <td data-bbox="861 1220 1473 1422">InGaAs-PIN photodiode <math>\varnothing</math> 100 <math>\mu</math>m integrated ball lens, suitable for fibers up to 62.5 <math>\mu</math>m core diameter</td> </tr> <tr> <td data-bbox="231 1422 513 1646">Output</td> <td data-bbox="513 1422 861 1646">Spectral range Max. sensitivity</td> <td data-bbox="861 1422 1473 1646">900 – 1700 nm 0.95 A/W typ. (@ 1550 nm)</td> </tr> <tr> <td data-bbox="231 1646 513 1825">Input Flange</td> <td data-bbox="513 1646 861 1825">Output voltage range</td> <td data-bbox="861 1646 1473 1825">1.9 V<sub>PP</sub> (@ 50 <math>\Omega</math> output load) for linear operation and low harmonic distortion</td> </tr> <tr> <td data-bbox="231 1825 513 1915">Coupler Ring (FST version only)</td> <td data-bbox="513 1825 861 1915">Output VSWR Output return loss Output impedance Output noise</td> <td data-bbox="861 1825 1473 1915">2.5:1 (@ <math>f &lt; 2.5</math> GHz) 7.3 dB (@ <math>f &lt; 2.5</math> GHz) 50 <math>\Omega</math> (terminate with 50 <math>\Omega</math> load) 3.6 mV<sub>RMS</sub> (24 mV<sub>PP</sub>) typ. (@ 50 <math>\Omega</math> load, no signal on detector, measurement bandwidth 4 GHz MHz)</td> </tr> <tr> <td data-bbox="231 1915 513 2056">Power Supply</td> <td data-bbox="513 1915 861 2056">Material</td> <td data-bbox="861 1915 1473 2056">1.4305 stainless steel, nickel-plated (FST flange) AlMg4.5Mn, nickel-plated (FS flange)</td> </tr> <tr> <td></td> <td data-bbox="513 1915 861 2056">Material</td> <td data-bbox="861 1915 1473 2056">1.4305 stainless steel, glass bead blasted</td> </tr> <tr> <td></td> <td data-bbox="513 1915 861 2056">Supply voltage Supply current</td> <td data-bbox="861 1915 1473 2056">+15 V 130 mA (depends on operating conditions, recommended power supply capability min. 200 mA)</td> </tr> </table>			Test conditions	$V_S = +15$ V, $T_A = 25$ °C, output load impedance 50 $\Omega$ , warm-up 20 minutes (min. 10 minutes recommended)	Gain	Transimpedance gain Conversion gain	$5.0 \times 10^3$ V/A (@ output load 50 $\Omega$ ) $4.75 \times 10^3$ V/W typ. (@ 1550 nm, output load 50 $\Omega$ )	Frequency Response	Lower cut-off frequency (–3 dB) Upper cut-off frequency (–3 dB)	10 kHz 2 GHz ( $\pm$ 15%)	Time Response	Rise/fall time (10 % – 90 %)	180 ps ( $\pm$ 15%)	Input	Noise equivalent power (NEP) Optical saturation power	16 pW/ $\sqrt{\text{Hz}}$ (@ 1550 nm, 100 MHz) 200 $\mu$ W AC (for linear amplification, @ 1550 nm) 10 mW CW (to prevent saturation, @ 1550 nm)	Detector	Detector Active area (FS/FST version) Active area (FC version)	InGaAs-PIN photodiode $\varnothing$ 100 $\mu$ m integrated ball lens, suitable for fibers up to 62.5 $\mu$ m core diameter	Output	Spectral range Max. sensitivity	900 – 1700 nm 0.95 A/W typ. (@ 1550 nm)	Input Flange	Output voltage range	1.9 V <sub>PP</sub> (@ 50 $\Omega$ output load) for linear operation and low harmonic distortion	Coupler Ring (FST version only)	Output VSWR Output return loss Output impedance Output noise	2.5:1 (@ $f < 2.5$ GHz) 7.3 dB (@ $f < 2.5$ GHz) 50 $\Omega$ (terminate with 50 $\Omega$ load) 3.6 mV <sub>RMS</sub> (24 mV <sub>PP</sub> ) typ. (@ 50 $\Omega$ load, no signal on detector, measurement bandwidth 4 GHz MHz)	Power Supply	Material	1.4305 stainless steel, nickel-plated (FST flange) AlMg4.5Mn, nickel-plated (FS flange)		Material	1.4305 stainless steel, glass bead blasted		Supply voltage Supply current	+15 V 130 mA (depends on operating conditions, recommended power supply capability min. 200 mA)
	Test conditions	$V_S = +15$ V, $T_A = 25$ °C, output load impedance 50 $\Omega$ , warm-up 20 minutes (min. 10 minutes recommended)																																				
Gain	Transimpedance gain Conversion gain	$5.0 \times 10^3$ V/A (@ output load 50 $\Omega$ ) $4.75 \times 10^3$ V/W typ. (@ 1550 nm, output load 50 $\Omega$ )																																				
Frequency Response	Lower cut-off frequency (–3 dB) Upper cut-off frequency (–3 dB)	10 kHz 2 GHz ( $\pm$ 15%)																																				
Time Response	Rise/fall time (10 % – 90 %)	180 ps ( $\pm$ 15%)																																				
Input	Noise equivalent power (NEP) Optical saturation power	16 pW/ $\sqrt{\text{Hz}}$ (@ 1550 nm, 100 MHz) 200 $\mu$ W AC (for linear amplification, @ 1550 nm) 10 mW CW (to prevent saturation, @ 1550 nm)																																				
Detector	Detector Active area (FS/FST version) Active area (FC version)	InGaAs-PIN photodiode $\varnothing$ 100 $\mu$ m integrated ball lens, suitable for fibers up to 62.5 $\mu$ m core diameter																																				
Output	Spectral range Max. sensitivity	900 – 1700 nm 0.95 A/W typ. (@ 1550 nm)																																				
Input Flange	Output voltage range	1.9 V <sub>PP</sub> (@ 50 $\Omega$ output load) for linear operation and low harmonic distortion																																				
Coupler Ring (FST version only)	Output VSWR Output return loss Output impedance Output noise	2.5:1 (@ $f < 2.5$ GHz) 7.3 dB (@ $f < 2.5$ GHz) 50 $\Omega$ (terminate with 50 $\Omega$ load) 3.6 mV <sub>RMS</sub> (24 mV <sub>PP</sub> ) typ. (@ 50 $\Omega$ load, no signal on detector, measurement bandwidth 4 GHz MHz)																																				
Power Supply	Material	1.4305 stainless steel, nickel-plated (FST flange) AlMg4.5Mn, nickel-plated (FS flange)																																				
	Material	1.4305 stainless steel, glass bead blasted																																				
	Supply voltage Supply current	+15 V 130 mA (depends on operating conditions, recommended power supply capability min. 200 mA)																																				

**Datasheet**
**HSA-X-S-2G-IN**

## Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode


**Specifications (continued)**

Case	Weight	133 g (0.29 lbs) HSA-X-S-2G-IN-FST incl. coupler ring 120 g (0.26 lbs) HSA-X-S-2G-IN-FS
	Material	110 g (0.24 lbs) HSA-X-S-2G-IN-FC AlMg4.5Mn, nickel-plated
Temperature Range	Storage temperature	-30 °C ... +85 °C
	Operating temperature	0 °C ... +60 °C

Absolute Maximum Ratings	Optical input power (CW)	12 mW (averaged)
	Power supply voltage	20 V

**Connectors**

Input	HSA-X-S-2G-IN-FST	1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories
	HSA-X-S-2G-IN-FS	25 mm dia. unthreaded flange for free space applications
	HSA-X-S-2G-IN-FC	FC fiber optic connector (fix/permanent, FC/PC and FC/APC compatible)
Output	SMA jack (female)	
Power supply	LEMO® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)	

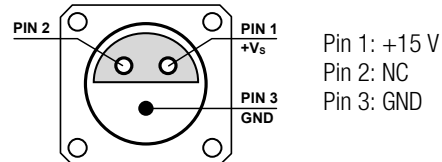
**Scope of Delivery**

HSA-X-S-2G-IN, internally threaded coupler ring (FST version only), LEMO® 3-pin connector, datasheet, transport package


**Ordering Information**

HSA-X-S-2G-IN-FST	1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories.
HSA-X-S-2G-IN-FS	25 mm dia. unthreaded flange for free space applications.
HSA-X-S-2G-IN-FC	FC fiber optic connector (fix/permanent, FC/PC and FC/APC compatible).

**Datasheet**
**HSA-X-S-2G-IN**

## Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode


Spectral Responsivity

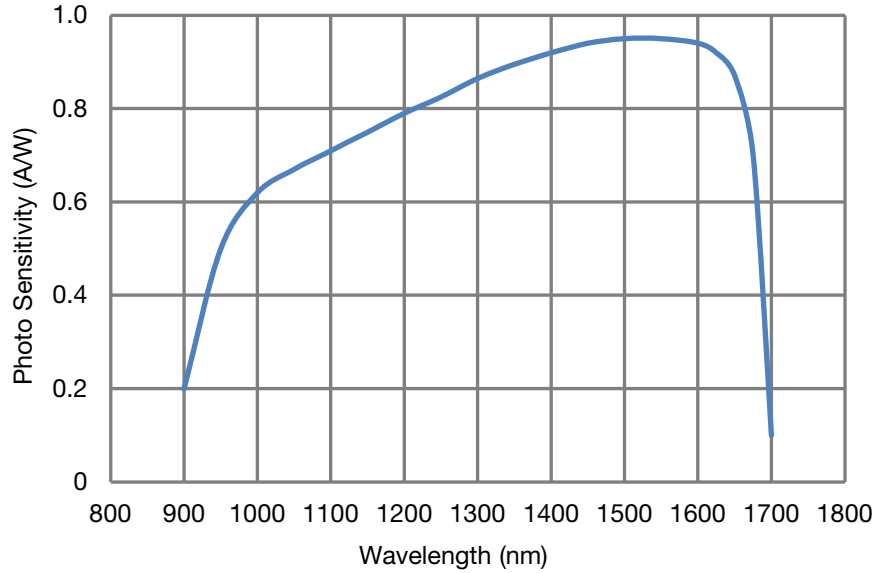

DB-Sens-HSA-X-S-2G-IN\_R01

Dimensions

HSA-X-S-2G-IN-FST (1.035"-40 threaded free space input)

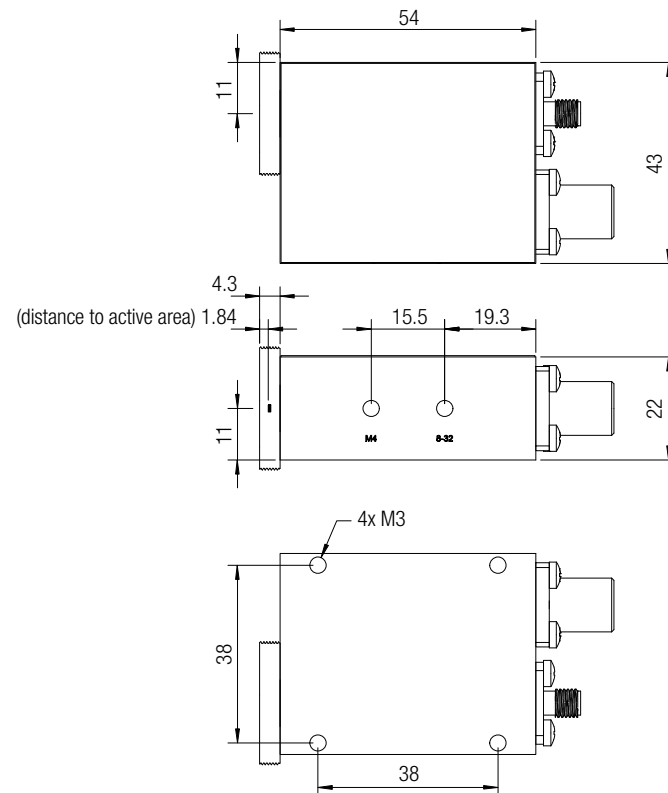


DZ-HSA-X-S-2G-IN\_FST\_R1

all dimensions in mm unless otherwise noted

## Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode

Dimensions (continued)

HSA-X-S-2G-IN-FS (25 mm dia. unthreaded free space input)

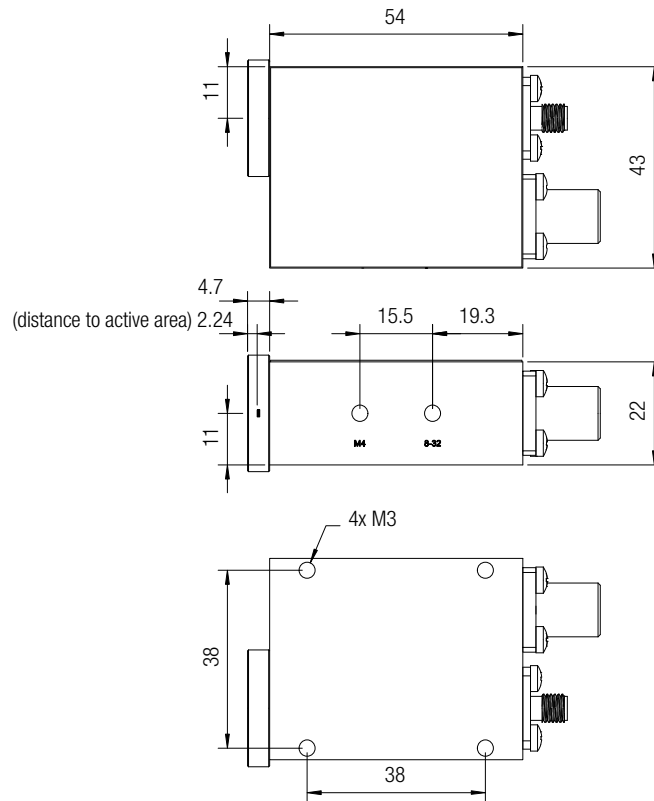

DZ-HSA-X-S-2G-IN\_FS\_R1


all dimensions in mm unless otherwise noted

**Datasheet**
**HSA-X-S-2G-IN**

## Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode

Dimensions (continued)

HSA-X-S-2G-IN-FC (FC fiber optic connector)

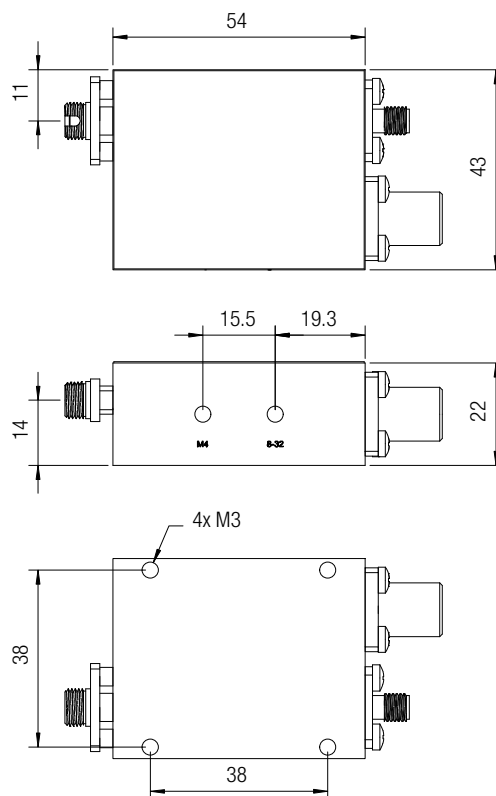

DZ-HSA-X-S-2G-IN\_FC\_R1

all dimensions in mm unless otherwise noted

FEMTO Messtechnik GmbH  
 Klosterstr. 64  
 10179 Berlin · Germany  
 Phone: +49 30 280 4711-0  
 Fax: +49 30 280 4711-11  
 Email: info@femto.de  
 www.femto.de

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany