


Tigris 640 Series

Areascan MWIR Camera

- MWIR cooled camera with 640 x 512 resolution
- Broadband versions available for MCT and InSb

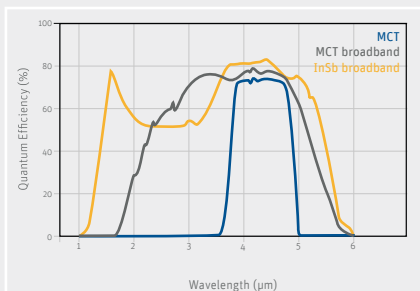

Cooled mid-wave infrared camera

The Tigris 640 is a cooled mid-wave infrared (MWIR) camera with a state-of-the-art InSb or MCT detector with 640 x 512 resolution.

The Tigris 640 InSb is able to provide a maximum frame rate of up to 320 Hz. The Tigris 640 MCT offers maximum full frame rate of up to 105 Hz.

A window of interest (WOI) is available for higher frame rates for both InSb and MCT.

We offer broadband versions for extended spectral sensitivity into the short-wave infrared (SWIR) band.

Tigris 640 uses either a CameraLink or GigE Vision digital interface. Analog out, HD-SDI and triggering are also available.




On the Tigris 640 InSb, we offer several temperature calibrations (-20-170°C, 120-350°C, 150-500°C).

Designed for use in

- Machine Vision
- Scientific & Advanced research
- Medical

Advantages

- Broadband imaging in SWIR and MWIR
- CameraLink, GigE Vision and analog interface
- Motorized filter wheel with multiple filters
- Thermography options available

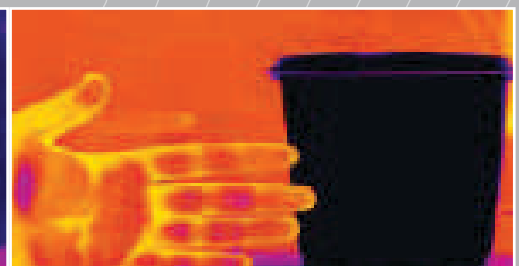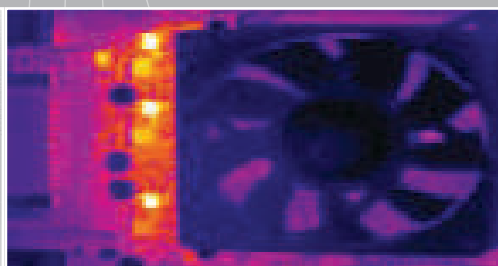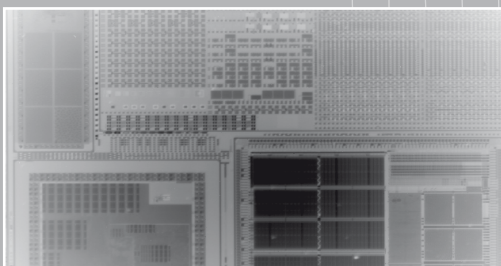

• On-wafer semiconductor hot spot detection

• Thermal imaging : Electronics circuit

• Thermal imaging : Cold cup

▶ Camera Specifications

Camera Specifications	Tigris 640 InSb	Tigris 640 InSb BB	Tigris 640 MCT	Tigris 640 MCT BB
Mechanical specifications				
Approximate dimensions - excluding lens [width x height x length] [mm]	100 x 145 x 199			
Weight [gr] - excluding lens	3500			
Optical interface	Bayonet [Janos]			
Connector GigE	RJ-45			
Connector CameraLink	Standard SDR			
Connector IRIG-B	BNC			
Connector Analog	BNC			
Connector SD-HDI	BNC			
Connector RS232	RJ-12			
Connector power	Phoenix			
Connector trigger	4 BNC connectors [2 for trigger in, 2 for trigger out]			
Environmental & power specifications				
Ambient operating temperature range - excluding lens [°C]	From -40 to +60			
Storage temperature [°C]	From -40 to +70			
Power consumption [W]	25			
Power supply voltage	DC 24 V			
Shock	MIL-STD810G; half sine; 40 g [11 ms]			
Vibration	Random: MIL-STD810G; 4.3 g			
Regulatory compliance	CE, RoHS			
Electro-optical specifications				
Image format [pixels]	640 x 512			
Pixel pitch [µm]	15			
Detector type	InSb photodiode array with digital ROIC	InSb photodiode array with digital ROIC	MCT photodiode array with ROIC	MCT photodiode array with ROIC
Sensor temperature cooling	Closed cycle rotary - Stirling cooler K508N	Closed cycle rotary - Stirling cooler K508N	Closed cycle rotary - Stirling cooler RM3	Closed cycle rotary - Stirling cooler RM3
Integration type	Snapshot - global shutter			
Active area and diagonal [mm]	10.24 x 7.68 [diagonal 12.8]			
Detector aperture	f/3			
Cold shield height [mm]	19.4	19.4	20.46	20.46
Detector NETD [Noise Equivalent Temperature Difference] [mK]	25	25	22	22
Spectral range [µm]	3.6 - 4.9	1.5 - 5.4	3.7 - 4.8	1.5 - 6
Filter wheel	Motorized, 5 positions			
Gain modes	High Gain [HG], High Dynamic Range [HDR]	High Gain [HG], High Dynamic Range [HDR]	Single Gain	Single Gain
Full well capacities [electrons]	1.5M [HG], 6M [HDR]	1.5M [HG], 6M [HDR]	6.36M [ITR], 4.99M [IWR]	6.36M [ITR], 4.99M [IWR]
Read out modes	ITR & IWR			
Pixel operability	>99.5%	>99.5%	>99.6%	>99.6%
Max frame rate [Hz] [Full frame]	320 [not at full bit resolution]	320 [not at full bit resolution]	105	105
Region of interest	Yes			
Min region size [pixels]	64 x 64 [step 16 x 16]	64 x 64 [step 16 x 16]	160 x 64 [step 16 x 16]	160 x 64 [step 16 x 16]
Max frame rate [Hz] [min region size]	>1000			
Analog-to-Digital [ADC] [bits]	13/14/15 [selectable on ROIC]	13/14/15 [selectable on ROIC]	14	14
Command and control	CameraLink, GigE Vision or RS232			
Digital output format	CameraLink or GigE Vision [16 bit]			
Trigger	Configurable, 2 in and/or 2 out			
Product selector guide				
Part number	XEN-000610	XEN-000611	XEN-000612	XEN-000613

XDS-0004-02 | Information furnished by Xenics is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are typical values and subject to change without notice. This information supersedes all previously supplied information.



For more information on our products please scan the QR code.



海纳光学

电话: 0755-84870203

邮箱: sales@highlightoptics.com

Xenics
Infrared Solutions
ISO 9001:2015